Technical **Data Sheet**

Denara

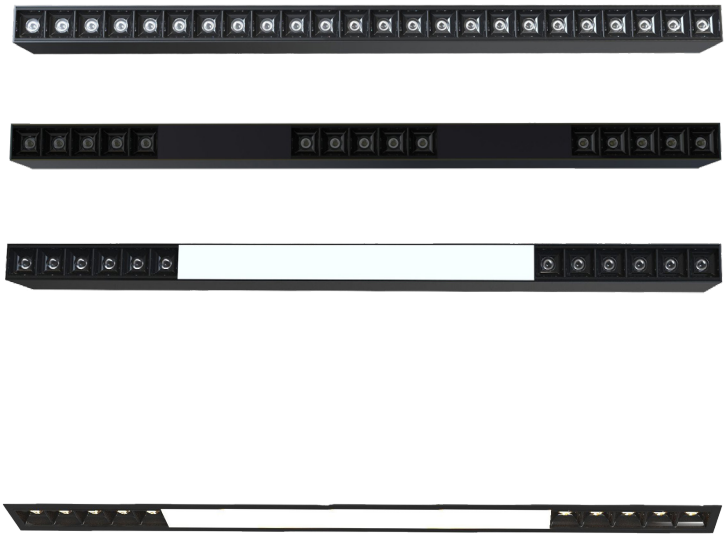

- Aluminium profile body
- Mains voltage 220-240V / 50-60Hz
- Emergency kit system can be integrated
- Different body color options
- Long life up to 50,000 hours
- 1-10V, DALI dimming and Tunable White, RGBW options are available
- Extra efficient diffuser for homogeneous light emission
- Microprismatic PMMA & Opal diffuser options
- Manufacturing in desired dimensions

12° -36°
48°
10X35°

Model	Code	Power	CRI 80				Dimensions
			2700K	3000K	4000K	5000K	
Denara	VTL.DNR.115.50	50 W	3900	4017	4138	4389	Ø 80 - L=1150
	VTL.DNR.115.67	67 W	5226	5383	5544	5882	Ø 80 - L=1150
	VTL.DNR.L.X	x	x	x	x	x	Ø 80 - L=∞
Recessed	VTL.DNR.115.50R	30 W	2400	2472	2546	2701	Ø 80 - L=1150
	VTL.DNR.115.67R	38 W	3040	3131	3225	3422	Ø 80 - L=1150
	VTL.DNR.L.XR	x	x	x	x	x	Ø 80 - L=∞